
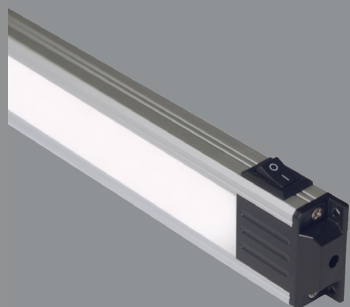


COLLECTION 2013

CABIN
DENMARK

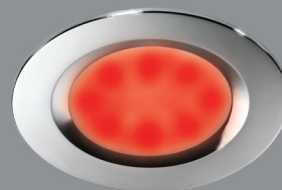

COLLECTION 2013

CABIN
DENMARK

READING LIGHT

CABIN BRASS	3
CABIN CHROMIUM	4
OCEAN	5
NEW CLASSIC	6
NEW LINE	7
CONCORDE	8
CONCORDE II	9
CONCORDE STAINLESS	10
C-LED	11
MINOR	12
SWING	13
SWING STAINLESS	14
JAZZ	15
LIGHT HOUSE	16

CHART LIGHTS

CABIN	17
OCEAN	18
NEW LINE	19
NEW CLASSIC	20
MINOR	21
SWING	22
C-LED	23
DOUB-LED	24

WALL + TABLE

LUZ WALL	25
LUZ WALL	26
LUZ TABLE	27

CEILING LAMPS

ANNE BRASS	28
ANNE STAINLESS	29
ANNE II	30
ANNE III	31
MIA BRASS	32
MIA STAINLESS	33
MIA II	34
MIA III	35

DOWN LIGHTS

CIRCLE	36
QUATTRO	37
CIRCLE	38
QUATTRO	39
QUATTRO DUE	40
CIRCLE II	41
QUATTRO II	42
CIRCLE II LED	43
QUATTRO II LED	44
QUATTRO II LED	45
5581SS	46
5581SS REWH	47
5581	48
5581REWH	49
5581WHS	50
5583WH	51
5586WH	52
5660	53
5860	54
5960	55

POWER LINE LED

1060 SERIES	56
1070 SERIES	57
6000 SERIES	58
6100 SERIES	59

CURTESY LIGHTS

1000 SERIES	60
1006 SERIES	61
1008 SERIES	62
1009 SERIES	63
1010 SERIES	64
1016 SERIES	65
1018 SERIES	66
1019 SERIES	67
1038 SERIES	68
1039 SERIES	69
1030-2 SERIES	70
1039-2 SERIES	71
1039-2 SERIES	72
1116 SERIES	73

MAST LED

MAST LED	74
SPREADER LED 6500	75
SPREADER LED 6600	76
SPREDAER LED	77
BOOM LED 6000	78
BOOM LED 6100	79
MAST SPREADER BOOM	80

CABIN BRASS

PROBABLY THE MOST BEAUTYFULL YACHT LAMP AT SEA

CABIN
DENMARK

The Danish Frigast Cabin light gives your yacht a touch of luxury and old world charm that only meticulous and full attention to detail can convey.

Cabin small is perfect as a reading light by the berth or in the cabin in smaller yachts.

For 30-50 foot yachts the Cabin medium is the better choice – whilst in larger yachts the Cabin large may be preferred.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium	Large
A	73mm/ 2.87in	90mm/ 3.54in	115mm/ 4.53in
B	115mm/ 4.53in	130mm/ 5.12in	172mm/ 6.77in
C	90mm/ 3.54in	90mm/ 3.54in	90mm/ 3.54in
D	110mm/ 4.33in	130mm/ 5.12in	156mm/ 6.14in

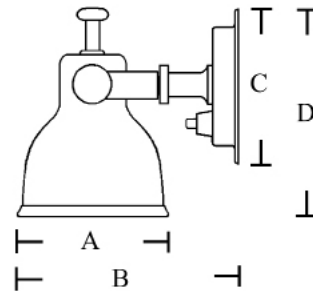

CABIN MEDIUM BRASS

Model	Material	Finish	Bulb/LED	Part. No.
Cabin small	Brass	Lacquer	G4 5-10W	10H
Cabin small	Brass	Lacquer	LED 1,2W	10LED
Cabin medium	Brass	Lacquer	G4 5-10W	20H
Cabin medium	Brass	Lacquer	LED 1,2W	20LED
Cabin large	Brass	Lacquer	G4 5-20W	40H
Cabin large	Brass	Lacquer	LED 1,2W	40LED

CABIN CHROMIUM

PROBABLY THE MOST BEAUTYFULL YACHT LAMP AT SEA

CABIN
DENMARK

The Danish Frigast Cabin light gives your yacht a touch of luxury and old world charm that only meticulous and full attention to detail can convey.

Cabin small is perfect as a reading light by the berth or in the cabin in smaller yachts. For 30-50 foot yachts the Cabin medium is the better choice – whilst in larger yachts the Cabin large may be preferred.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium	Large
A	73mm/ 2.87in	90mm/ 3.54in	115mm/ 4.53in
B	115mm/ 4.53in	130mm/ 5.12in	172mm/ 6.77in
C	90mm/ 3.54in	90mm/ 3.54in	90mm/ 3.54in
D	110mm/ 4.33in	130mm/ 5.12in	156mm/ 6.14in

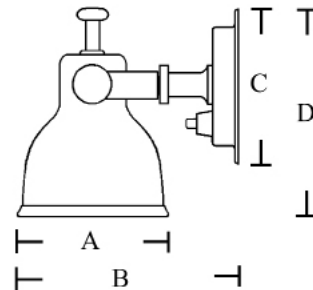

Model	Material	Finish	Bulb/LED	Part. No.
Cabin small	Brass	Chromium	G4 5-10W	11H
Cabin small	Brass	Chromium	LED 1,2W	11LED
Cabin medium	Brass	Chromium	G4 5-10W	21H
Cabin medium	Brass	Chromium	LED 1,2W	21LED
Cabin large	Brass	Chromium	G4 5-20W	41H
Cabin large	Brass	Chromium	LED 1,2W	41LED

OCEAN

PROBABLY THE STRONGEST YACHT LAMP AT SEA

CABIN
DENMARK

This maintenance free OCEAN light is made of highly finished stainless steel and fitted with a badge made of 24 carat gold plated brass. The bell swivels smoothly in all directions. The small model is perfect as a reading light by the berth or in the cabin in smaller yachts. In larger yachts the Ocean medium is the right choice.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium
A	75mm/2.96in	90mm/3.54in
B	115mm/4.53in	130mm/5.12in
C	92mm/3.62in	92mm/3.62in
D	112mm/4.45in	130mm/5.12in

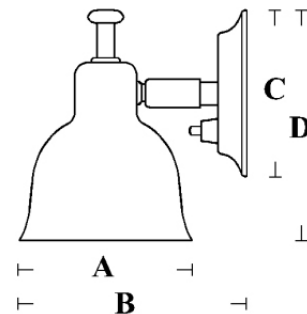

OCEAN MEDIUM

Model	Material	Finish	Bulb/LED	Part. No.
Ocean medium	Stainless steel	Highly finished	G4 5-10W	60H
Ocean medium	Stainless steel	Highly finished	LED 1,2W	60LED
Ocean small	Stainless steel	Highly finished	G4 5-10W	70H
Ocean small	Stainless steel	Highly finished	LED 1,2W	70LED

NEW CLASSIC

CABIN
DENMARK

New Classic is a range of lights with a soft timeless design meeting the demand for both reading and general light. The bell swivels smoothly in all directions to cast a pool of light wherever needed.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	80mm/3.15in
B	130mm/5.12in
C	92mm/3.62in
D	130mm/5.12in

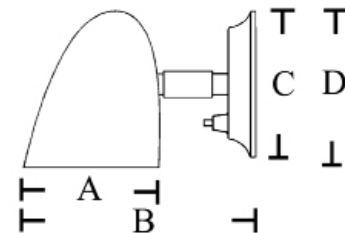

NEW CLASSIC BRASS

Model	Material	Finish	Bulb/LED	Part. No.
New Classic	Brass	Laquer	G4 5-10W	620H
New Classic	Brass	Laquer	LED 1,2W	620LED
New Classic	Brass	Anthracite	G4 5-10W	620HAN
New Classic	Brass	Anthracite	LED 1,2W	620LEDAN
New Classic	Brass	Chromium	G4 5-10W	621H
New Classic	Brass	Chromium	LED 1,2W	621LED

NEW LINE

CABIN
DENMARK

A modern range of lights designed for use in smaller yachts or as reading light in any yacht. The bell swivels in all directions.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	72mm/2.84in
B	110mm/4.33in
C	72mm/2.84in
D	110mm/4.33in

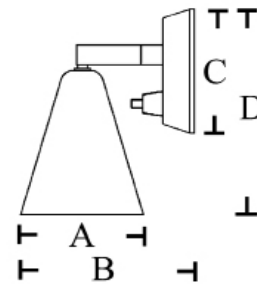

NEW LINE STAINLESS

Model	Material	Finish	Bulb/LED	Part. No.
New Line	Brass	Laquer	G4 5-10W	310H
New Line	Brass	Laquer	LED 1,2W	310LED
New Line	Stainless steel	Highly finished	G4 5-10W	311H
New Line	Stainless steel	Highly finished	LED 1,2W	311LED
New Line	Stainless steel	Brushed	G4 5-10W	311HBRU
New Line	Stainless steel	Brushed	LED 1,2W	311LEDBRU

CONCORDE


“MARTINI GLASS”

CABIN
DENMARK

The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	110mm/4.33in
B	140mm/5.51in
C	92mm/3.62in
D	125mm/4.93in

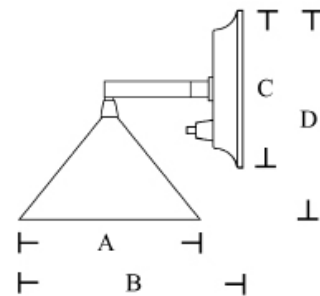

CONCORDE STAINLESS WHITE

Model	Material	Finish	Bulb	Part. No.
Concorde Blue	Stainless steel	Highly finished	G4 10W F	920BL
Concorde Green	Stainless steel	Highly finished	G4 10W F	920GR
Concorde White	Stainless steel	Highly finished	G4 10W F	920WH
Concorde Green	Brass	Lacquer	G4 10W F	929GR
Concorde White	Brass	Lacquer	G4 10W F	929WH
Concorde Blue	Brass	Lacquer	G4 10W F	929BL


CONCORDE II

CABIN
DENMARK

The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	110mm/4.33in
B	140mm/5.51in
C	72mm/3.62in
D	125mm/4.93in

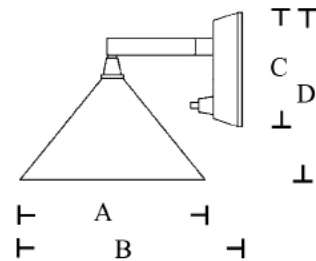

Model	Material	Finish	Bulb	Part. No.
Concorde Blue	Stainless steel	Highly finished	G4 10W F	911BL
Concorde Green	Stainless steel	Highly finished	G4 10W F	911GR
Concorde White	Stainless steel	Highly finished	G4 10W F	911WH



CONCORDE II STAINLESS WHITE

CONCORDE STAINLESS

CABIN
DENMARK

A modern range of lights designed for use in yachts. The bell swivels in all directions.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	110mm/4.33in
B	140mm/5.51in
C	72mm/3.62in
D	125mm/4.93in

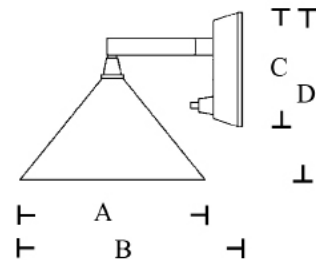

CONCORDE STAINLESS

Model	Material	Finish	Bulb/LED	Part. No.
Concorde	Stainless steel	Highly finished	G4 5-10W	326H
Concorde	Stainless steel	Highly finished	1,2W LED	326LED
Concorde	Stainless steel	Brushed	G4 5-10W	326HBRU
Concorde	Stainless steel	Brushed	1,2W LED	326LEDBRU
Concorde	Stainless steel	Anthracite	G4 5-10W	326HAN
Concorde	Stainless steel	Anthracite	1,2W LED	326LEDAN

C-LED

C-LED the revolution in Yacht lighting.
Breathtaking design, function and light quality
for modern Yachts.


Save 80%-90% energy!

The LED lights are mounted with one warm
white Power LED which gives excellent
reading light.

LED lights are mounted with a multivoltage
10V-30V LED driver.

The lifetime of the LED is more than
50.000h.

	Dimensions mm/in
A	35mm/1.35in
B	70mm/2.75in
C	45mm/1.75in
D	85mm/3.38in

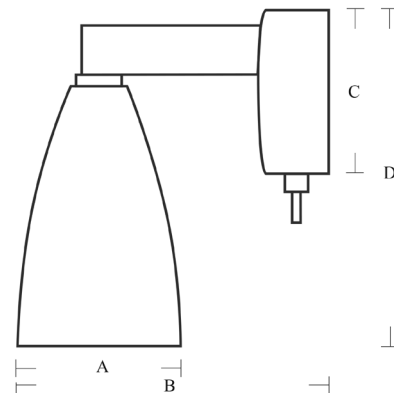

C-LED 1411



C-LED 1419



C-LED 1418

Model	Material	Finish		Part. No.
C-LED	Stainless steel	Highly finished	1,2W LED	1411
C-LED	Aluminum	Black	1,2W LED	1418
C-LED	Aluminum	Titan	1,2W LED	1419


MINOR

CABIN
DENMARK

The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	70mm/2.75in
B	110mm/4.33in
C	72mm/2.84in
D	110mm/4.33in

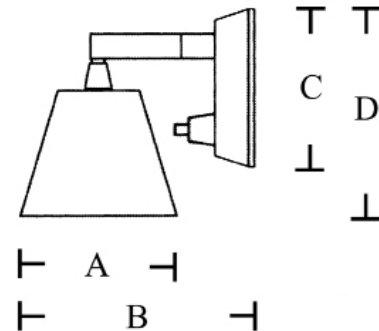

MINOR STAINLESS WHITE


Model	Material	Finish	Bulb	Part. No.
Minor	Brass	Lacquer	G4 10W F	900WH
Minor	Stainless steel	Highly finished	G4 10W F	901WH

SWING

A modern soft-line range of lights designed for use in smaller yachts or as reading light in any yacht. The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	70mm/2.75in
B	110mm/4.33in
C	72mm/2.84in
D	110mm/4.33in

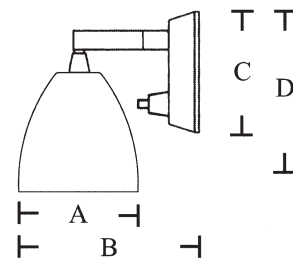

SWING STAINLESS WHITE

Model	Material	Finish	Bulb	Part. No.
Swing	Brass	Lacquer	G4 10W F	940WH
Swing	Stainless steel	Highly finished	G4 10W F	941WH

SWING STAINLESS

A modern soft-line range of lights designed for use in smaller yachts or as reading light in any yacht. The bell swivels in all directions.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	70mm/2.75in
B	110mm/4.33in
C	72mm/2.84in
D	110mm/4.33in

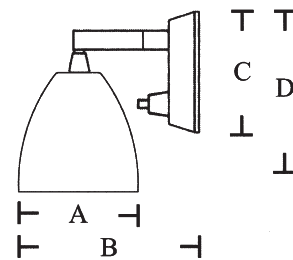

SWING STAINLESS

Model	Material	Finish	Bulb/LED	Part. No.
Swing	Stainless steel	Highly finished	G4 5-10W	341H
Swing	Stainless steel	Highly finished	LED 1,2W	341LED


JAZZ

CABIN
DENMARK

A modern soft-line range of lights designed for larger yachts. The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	110mm/4.33in
B	125mm/4.93in
C	92mm/3.62in
D	160mm/6.30in

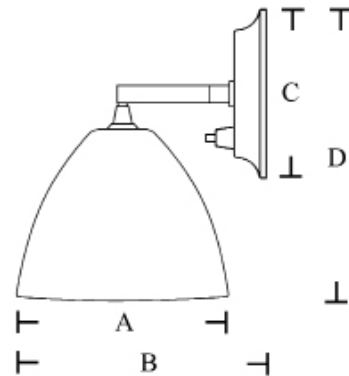

JAZZ STAINLESS WHITE

Model	Material	Finish	Bulb	Part. No.
Jazz	Brass	Lacquer	G4 10W F	950WH
Jazz	Stainless steel	Highly finished	G4 10W F	951WH

LIGHT HOUSE

CABIN
DENMARK

Erik Magnussen designed wall light.
Integrated switch - the light goes on when the
light is "opened". Can be turned in all
directions.

A Danish design award winner.

Dimensions	mm	in
Diameter	90	3.54
Depth	50	2.00
Depth fully open	110	4.33

Model	Material
Light-House	Polycarbonate

Bulb	Part. No.
G4 5-10W	LH201WH



LIGHT HOUSE

CABIN CHART

The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give lights exactly where it is needed.

Save 80%-90% energy!

The LED lights are mounted with one warm white Power LED which gives excellent reading light.


LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium
A	75mm/2.96in	90mm/3.54in
B	115mm/4.53in	130mm/5.12in
C	92mm/3.62in	92mm/3.62in
D	112mm/4.45in	130mm/5.12in

Flex arm 400mm/15.75in

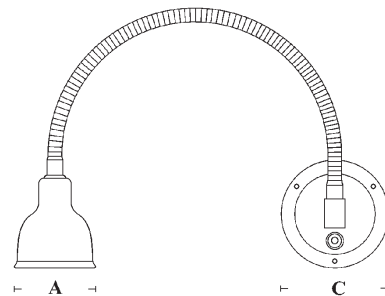

CABIN CHART MEDIUM BRASS

Model	Material	Finish	Bulb/LED	Part. No.
Cabin chart small	Brass	Lacquer	G4 5-10W	30H
Cabin chart small	Brass	Lacquer	LED 1,2W	30LED
Cabin chart small	Brass	Chromium	G4 5-10W	31H
Cabin chart small	Brass	Chromium	LED 1,2W	31LED
Cabin chart medium	Brass	Lacquer	G4 5-10W	50H
Cabin chart medium	Brass	Lacquer	LED 1,2W	50LED
Cabin chart medium	Brass	Chromium	G4 5-10W	51H
Cabin chart medium	Brass	Chromium	LED 1,2W	51LED

OCEAN CHART

CABIN
DENMARK

The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give lights exactly where it is needed.

Save 80%-90% energy!

The LED version is mounted with one warm white Power LED which gives excellent light to read.


All LED lights are mounted with multivoltage 10V-30V LED driver.

Lifetime of LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium
A	75mm/2.96in	90mm/3.54in
B	115mm/4.53in	130mm/5.12in
C	92mm/3.62in	92mm/3.62in
D	112mm/4.45in	130mm/5.12in

Flex arm 400mm/15.75in

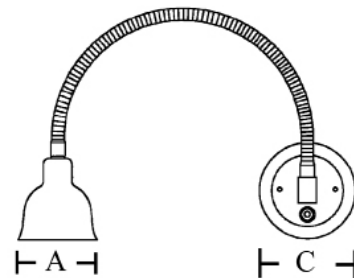

OCEAN CHART SMALL

Model	Material	Finish	Bulb/LED	Part. No.
Ocean chart small	Stainless steel	Highly finished	G4 5-10W	36H
Ocean chart small	Stainless steel	Highly finished	LED 1,2W	36LED
Ocean chart medium	Stainless steel	Highly finished	G4 5-10W	56H
Ocean chart medium	Stainless steel	Highly finished	LED 1,2W	56LED

NEW LINE CHART

The New Line chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

Dimensions mm/in	
A	72mm/2.84in
C	72mm/2.84in
Flex arm 400mm/15.75in	

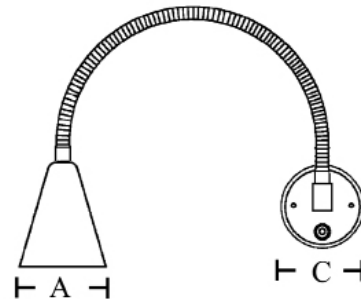

NEW LINE CHART BRASS

Model	Material	Finish	Bulb/LED	Part. No.
New Line chart	Brass	Lacquer	G4 5-10W	330H
New Line chart	Brass	Lacquer	1,2W LED	330LED
New Line chart	Stainless steel	Highly finished	G4 5-10W	331H
New Line chart	Stainless steel	Highly finished	1,2W LED	331LED
New Line chart	Stainless steel	Brushed	G4 5-10W	331HBRU
New Line chart	Stainless steel	Brushed	1,2W LED	331LEDBRU

NEW CLASSIC CHART

CABIN
DENMARK

The New Classic chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

Dimensions mm/in	
A	80mm/3.15in
C	92mm/6.62in
Flex arm 400mm/15.75in	

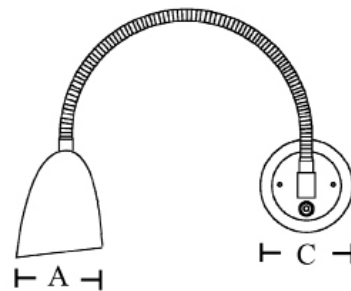

NEW CLASSIC CHART CHROMIUM

Model	Material	Finish	Bulb/LED	Part. No.
New Classic chart	Brass	Lacquer	G4 5-10W	650H
New Classic chart	Brass	Lacquer	LED 1,2W	650LED
New Classic chart	Brass	Anthracite	G4 5-10W	650HAN
New Classic chart	Brass	Anthracite	LED 1,2W	650LEDAN
New Classic chart	Brass	Chromium	G4 5-10W	651H
New Classic chart	Brass	Chromium	LED 1,2W	651LED


MINOR CHART

CABIN
DENMARK

The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

Dimensions mm/in	
A	70mm/2.75in
C	72mm/2.84in
Flex arm 400mm/15.75in	

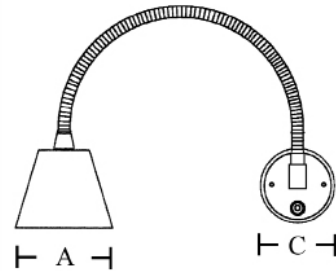

MINOR CHART BRASS WHITE

Model	Material	Finish	Bulb	Part. No.
Minor chart	Brass	Lacquer	G4 10W F	930WH
Minor chart	Stainless steel	Highly finished	G4 10W F	931WH


SWING CHART

CABIN
DENMARK

The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

The lights are used with low consumption 12V or 24V G4 halogen bulb.

Dimensions mm/in	
A	70mm/2.75in
C	72mm/2.84in
Flex arm 400mm/15.75in	

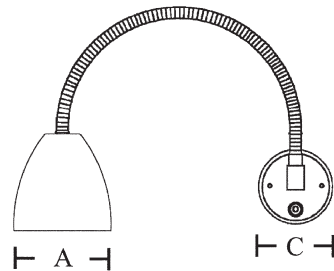

SWING CHART BRASS WHITE

Model	Material	Finish	Bulb	Part. No.
Swing chart	Brass	Lacquer	G4 10W F	960WH
Swing chart	Stainless steel	Highly finished	G4 10W F	961WH

C-LED FLEX

C-LED the revolution in Yacht lighting.
Breathtaking design, function and light quality
for modern Yachts.


Save 80%-90% energy!

The LED lights are mounted with one warm
white Power LED which gives excellent
reading light.

LED lights are mounted with a multivoltage
10V-30V LED driver.

The lifetime of the LED is more than
50.000h.

	Dimensions mm/in
A	35mm/1.35in
C	45mm/1.75in
	Flex arm 250mm/9,85in

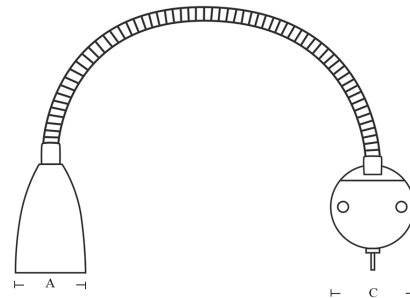

C-LED FLEX ALUMINUM TITAN

Model	Material	Finish	LED	Part. No.
C-LED FLEX	Stainless steel	Highly finished	1,2W LED	1431
C-LED FLEX	Aluminum	Black	1,2W LED	1438
C-LED FLEX	Aluminum	Titan	1,2W LED	1439

DOUB-LED

TWO COLOURED LED CHART TABLE LIGHT

CABIN
DENMARK


DOUB-LED is a new chart table light with warm white reading light and red night light.
For table mounting.
Mounted with a three direction switch.
Left: white, right: red, middle: off

Life time of LED >50.000h
Power consumption 1.5W white, 0.5W red.


Dimensions

Head/tube L 125mm
Diameter 22mm
Base Diameter 51mm
Flex-arm L 350mm

Model	Material	Finish	LED	Part. No.
DOUB-LED Table	Stainless steel	Highly finished	12 + 8 LED	1441T REWH 12V
DOUB-LED Table	Stainless steel	Highly finished	12 + 8 LED	1441T REWH 24V

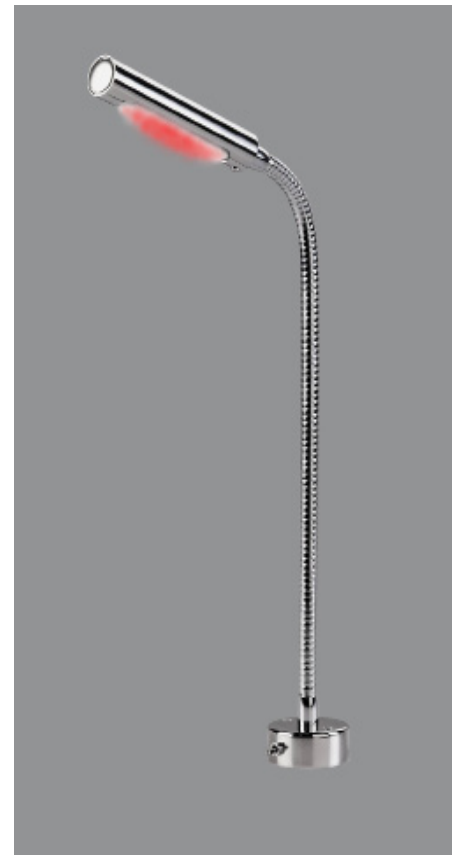

DOUB-LED TABLE MOUNTED

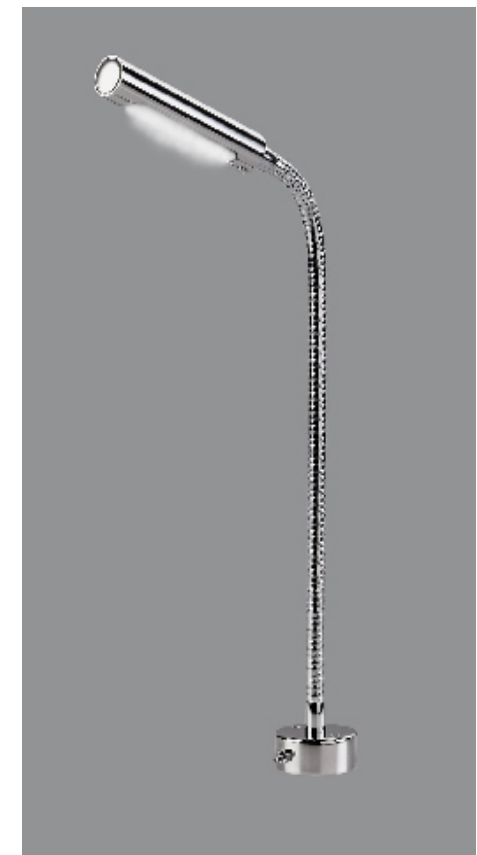


DOUB-LED TABLE MOUNTED

LUZ WALL

CABIN
DENMARK

The exclusive design makes Luz fit into modern interiors.
The curved shade gives a soft light, and can be placed wherever you want to play with light. The smoothness of the light contributes to a harmonic environment and makes you feel at home.

	Dimensions mm/in
A	190mm/7.50in
B	240mm/9.50in
C	230mm/9.10in
D	130mm/5.12in

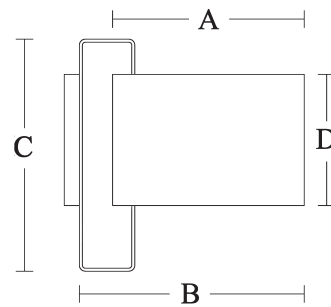

LUZ WALL LAMP

Model	Material	Finish	Bulb	Part. No.
Luz Wall	Stainless steel	Highly finished	G4 max. 20W	2011WH




X-YACHTS OF DENMARK
LUZ WALL LAMP IN
OWNERS CABIN X-65

LUZ TABLE

CABIN
DENMARK

The exclusive design makes Luz fit into modern interiors.
The curved shade gives a soft light, and can be placed wherever you want to play with light. The smoothness of the light contributes to a harmonic environment and makes you feel at home.

	Dimensions mm/in
A	200mm/7.90in
B	450mm/17.75in
C	40mm/1.57in
D	150mm/2.17in

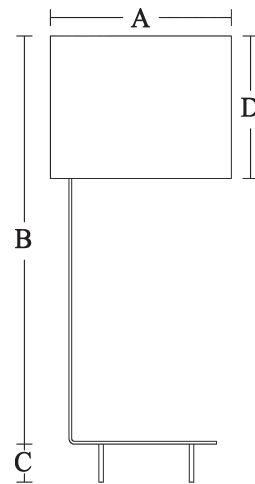

Model	Material	Finish	Bulb	Part. No.
Luz Rable	Stainless steel	Highly finished	G4 max. 20W	2511WH



LUZ TABLE LAMP

ANNE

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Anne is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

Save 70% energy!


The LED lights are mounted with three warm white Power LED's which gives excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	165mm/6.50in
B	45mm/1.77in



ANNE BRASS

Model	Material	Finish	Bulb/LED	Part. No.
ANNE	Brass	Lacquer	G4 10W F	160H
ANNE	Brass	Lacquer	G4 10W F	160HS
ANNE	Brass	Lacquer	3x1,2W LED	160LED
ANNE	Brass	Lacquer	3x1,2W LED	160LEDS
ANNE	Brass	Lacquer	3x1,2W LED	160LEDS 2B
	S=SWITCH	2B = WHITE POWER LED + RED NIGHTLIGHT		

ANNE

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Anne is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

Save 70% energy!


The LED lights are mounted with three warm white Power LED's which gives excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	165mm/6.50in
B	45mm/1.77in



Model	Material	Finish	Bulb/LED	Part. No.
ANNE	Stainless steel	Highly finished	G4 10W F	161H
ANNE	Stainless steel	Highly finished	G4 10W F	161HS
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LED
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LEDS
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LEDS 2B
	S=SWITCH	2B = WHITE POWER LED + RED NIGHTLIGHT		



ANNE STAINLESS STEEL


ANNE II

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Anne II is the perfect choice for smaller and medium yachts.

The lights are used with low consumption 12V or 24V G4 halogen bulb

	Dimensions mm/in
A	155mm/6.30in
B	32mm/1.26in
C	25mm/0.98in
D	125mm/4.92in

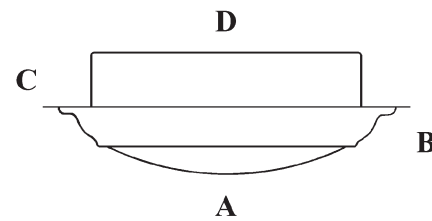

Model	Material	Finish	Bulb	Part. No.
ANNE II	Brass	Laquer	G4 10W F	150H
ANNE II	Stainless steel	Highly finished	G4 10W F	156H



ANNE II BRASS

ANNE III

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Anne III is the perfect choice for smaller and medium yachts.


Save 70% energy!

The LED lights are mounted with three warm white Power LED's which give excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	155mm/6.30in
B	32mm/1.26in



ANNE III BRASS

Model	Material	Finish	LED	Part. No.
ANNE III	Brass	Laquer	3x1,2W LED	140LED
ANNE III	Stainless steel	Highly finished	3x1,2W LED	146LED

MIA

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Mia is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

Save 70% energy!


The LED lights are mounted with three warm white Power LED's which gives excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	200mm/7.88in
B	55mm/2.17in



Model	Material	Finish	Bulb/LED	Part. No.
MIA	Brass	Lacquer	G4 10-20W	200H
MIA	Brass	Lacquer	G4 10-20W	200HS
MIA	Brass	Lacquer	3x1,2W LED	200LED
MIA	Brass	Lacquer	3x1,2W LED	200LEDS
MIA	Brass	Lacquer	3x1,2W LED	200LEDS 2B
	S=SWITCH	2B = WHITE POWER LED + RED LED		



MIA BRASS

MIA

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Mia is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

Save 70% energy!


The LED lights are mounted with three warm white Power LED's which gives excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
A	200mm/7.88in
B	55mm/2.17in



Model	Material	Finish	Bulb/LED	Part. No.
MIA	Stainless steel	Highly finished	G4 10-20W F	201H
MIA	Stainless steel	Highly finished	G4 10-20W F	201HS
MIA	Stainless steel	Highly finished	3x1,2W LED	201LED
MIA	Stainless steel	Highly finished	3x1,2W LED	201LEDS
MIA	Stainless steel	Highly finished	3x1,2W LED	201LEDS 2B
	S=SWITCH	2B = WHITE POWER LED + RED LED		



MIA STAINLESS STEEL


MIA II

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Mia II is the perfect choice for medium and larger yachts.

The lights are used with low consumption 12V or 24V G4 halogen bulb

	Dimensions mm/in
A	195mm/7.68in
B	32mm/1.26in
C	25mm/0.98in
D	160mm/6.30in

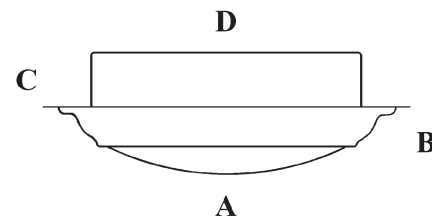

Model	Material	Finish	Bulb	Part. No.
MIA II	Brass	Laquer	G4 10-20W	190H
MIA II	Stainless steel	Highly finished	G4 10-20W	191H



MIA II BRASS

MIA III

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Mia III is the perfect choice for medium and larger yachts.


Save 70% energy!

The LED version is mounted with three similar to warm white Power LED which gives excellent light.

All LED lights are mounted with multivoltage 10V-30V LED driver.

Lifetime of LED is more than 50.000h.

Dimensions mm/in	
A	195mm/7.68in
B	32mm/1.26in



MIA III BRASS

Model	Material	Finish	LED	Part. No.
MIA III	Brass	Laquer	3x1,2W LED	180LED
MIA III	Stainless steel	Highly finished	3x1,2W LED	181LED

DOWNLIGHT CIRCLE

FIXED LIGHT
HALOGEN


CABIN
DENMARK

Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
A	60mm/2.37in
B	15mm/0.59in
C	40mm/1.58in
D	40mm/1,58in

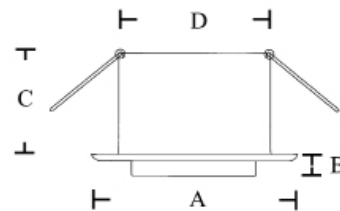

DOWNLIGHT CIRCLE FIXED

Model	Material	Finish	Bulb	Part. No.
CIRCLE	Stainless steel	Highly finished	GU4 10W	540-03
CIRCLE	Stainless steel	Brushed	GU4 10W	540-03BRU

DOWNLIGHT QUATTRO

FIXED LIGHT
HALOGEN


CABIN
DENMARK

Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
A	57,5x57,5mm/2.27x2.27in
B	15mm/0.59in
C	40mm/1.58in
D	40mm/1,58in

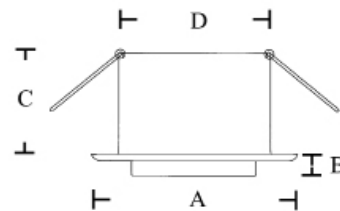

DOWNLIGHT QUATTRO FIXED

Model	Material	Finish	Bulb	Part. No.
QUATTRO	Stainless steel	Highly finished	GU4 10W	541-03
QUATTRO	Stainless steel	Brushed	GU4 10W	541-03BRU

DOWNLIGHT CIRCLE HALOGEN


CABIN
DENMARK

Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gap between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/ MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
A	75mm/2.95in
B	15mm/0.59in
C	40mm/1.58in
D	55mm/2.17in

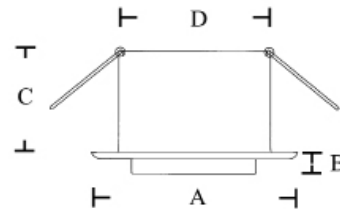

DOWNLIGHT CIRCLE BRUSHED

Model	Material	Finish	Bulb	Part. No.
CIRCLE	Stainless steel	Highly finished	GU4 20W	540-11
CIRCLE	Stainless steel	Brushed	GU4 20W	540-11BRU

DOWNLIGHT QUATTRO

HALOGEN


CABIN
DENMARK

Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gap between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
A	75x75mm/2.95x2.95in
B	15mm/0.59in
C	40mm/1.58in
D	55mm/2.17in

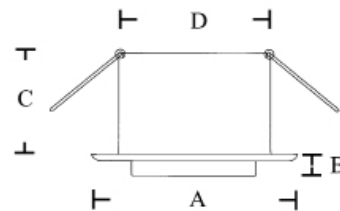

DOWNLIGHT QUATTRO BRUSHED

Model	Material	Finish	Bulb	Part. No.
QUATTRO	Stainless steel	Highly finished	GU4 20W	541-11
QUATTRO	Stainless steel	Brushed	GU4 20W	541-11BRU

DOWNLIGHT QUATTRO DUE HALOGEN


CABIN
DENMARK

Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gap between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
A	140x75mm/5.51x2.95in
B	15mm/0.59in
C	40mm/1.58in
D	55mm/2.17in

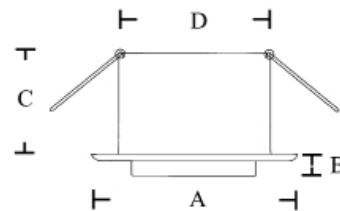

DOWNLIGHT QUATTRO II BRUSHED

Model	Material	Finish	Bulb	Part. No.
QUATTRO DUE	Stainless steel	Highly finished	GU4 20W	542-11
QUATTRO DUE	Stainless steel	Brushed	GU4 20W	542-11BRU

DOWNLIGHT CIRCLE II

HALOGEN


CABIN
DENMARK

Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gap between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
A	75mm/2.95in
B	2mm/0.078in
C	52mm/2.05in
D	55mm/2.17in

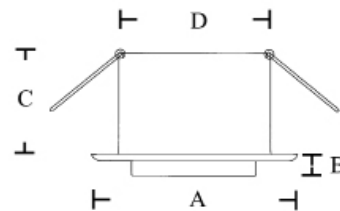

DOWNLIGHT QUATTRO II

Model	Material	Finish	Bulb	Part. No.
CIRCLE II	Stainless steel	Highly finished	GU4 20W	550-11
CIRCLE II	Stainless steel	Brushed	GU4 20W	550-11BRU

DOWNLIGHT QUATTRO II

HALOGEN


CABIN
DENMARK

Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gap between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
A	75x75mm/2.95x2.95in
B	2mm/0.078in
C	52mm/2.05in
D	55mm/2.17in

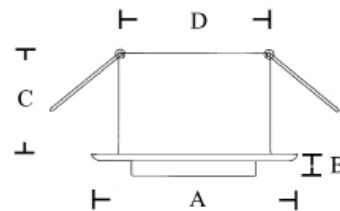

DOWNLIGHT QUATTRO II

Model	Material	Finish	Bulb	Part. No.
Quattro II	Stainless steel	Highly finished	GU4 20W	551-11
Quattro II	Stainless steel	Brushed	GU4 20W	551-11BRU

DOWNLIGHT CIRCLE II

LED

CABIN
DENMARK


Recessed tiltable LED downlight.
Unique construction with 2mm stainless steel house and black aluminum lamp holder.

Save energy with LED downlight!
The warm white power LED's give excellent light with a minimum of power consumption.

LED: 3
Power consumption: 3,6W
Colour temperature: 3000k
CRI >85
Lightcone: 25°
On request: 16°, 40°
Lifetime >40.000h
Fixing: 2 springs

For use with 350mA LED driver.
Driver to be ordered separately.

	Dimensions mm/in
A	75mm/2.95in
B	2mm/0.078in
C	34mm/1.34in
D	55mm/2.17in

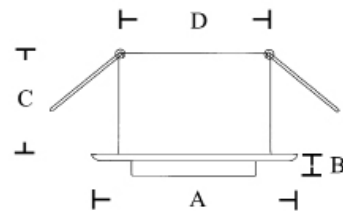

DOWNLIGHT CIRCLE II LED

Model	Material	Finish	LED	Part. No.
CIRCLE II LED	Stainless steel	Highly finished	3x1,2W LED	5500-11
CIRCLE II LED	Stainless steel	Brushed	3x1,2W LED	5500-11BRU

DOWNLIGHT QUATTRO II LED

CABIN
DENMARK


Recessed tiltable LED downlight.
Unique construction with 2mm stainless steel house and black aluminum lamp holder.

Save energy with LED downlight!
The warm white power LED's give excellent light with a minimum of power consumption.

LED: 3
Power consumption: 3,6W
Colour temperature: 3000k
CRI >85
Lightcone: 25°
On request: 16°, 40°
Lifetime >40.000h
Fixing: 2 springs

For use with 350mA LED driver.
Driver to be ordered separately.

	Dimensions mm/in
A	75x75mm/2.95x2.95in
B	2mm/0.078in
C	34mm/1.34in
D	55mm/2.17in

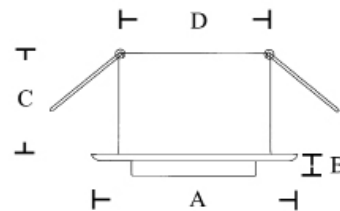

DOWNLIGHT QUATTRO II LED

Model	Material	Finish	LED	Part. No.
Quattro II LED	Stainless steel	Highly finished	3x1,2W LED	5510-11
Quattro II LED	Stainless steel	Brushed	3x1,2W LED	5510-11BRU



X-YACHTS OF DENMARK
LED DOWNLIGHT 5510-11
IN X-65

DOWNLIGHT 5581SS

LED

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.


- Excellent warm white light.
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

	Dimensions mm/in
A	70mm/2.75in
B	2mm/0.078in
C	18mm/0.70in
D	55mm/2.17in

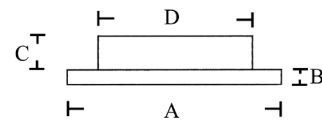

DOWNLIGHT 5581SS

Model	Material	Finish	LED	Part. No.
5581SS	Stainless/alu.	Highly finished	18x0,1W LED	5581SS
5581SS	Stainless/alu	Highly finished	18x0,1W LED	5581SS 24V

DOWNLIGHT 5581SS REWH

LED WITH NIGHT LIGHT

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts with night light function.


- Excellent warm white light.
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18+8
 Light output: 170lm
 Power consumption: 2W white, 0,5W red
 Colour temp: 3000K
 CRI> 80
 Lightcone>120°
 Lifetime>40.000h
 Fixing: 2 springs

Internal driver for 12V DC (11-16V)
 Internal driver for 24V DC (23-29V)

	Dimensions mm/in
A	70mm/2.75in
B	2mm/0.078in
C	18mm/0.70in
D	55mm/2.17in

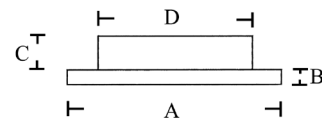

DOWNLIGHT 5581SS REWH

Model	Material	Finish	LED	Part. No.
5581SS REWH	Stainless/alu.	Highly finished	18+8x0,1W LED	5581SS REWH
5581SS REWH	Stainless/alu	Highly finished	18+8x0,1W LED	5581SS REWH 24V

DOWNLIGHT 5581

LED

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.


- Excellent warm white light.
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs

Internal driver for 12V DC (11-16V)
Internal driver for 24V DC (23-29V)

	Dimensions mm/in
A	70mm/2.75in
B	2mm/0.078in
C	18mm/0.70in
D	55mm/2.17in

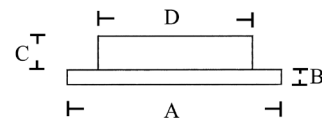

DOWNLIGHT 5581AL



DOWNLIGHT 5581BLACK



DOWNLIGHT 5581WH

Model	Material	Finish	LED	Part. No.
5581	Aluminium	Titan	18x0,1W LED	5581AL
5581	Aluminium	Titan	18x0,1W LED	5581AL 24V
5581	Aluminium	Black	18x0,1W LED	5581BLACK
5581	Aluminium	Black	18x0,1W LED	5581BLACK24V
5581	Aluminium	White	18x0,1W LED	5581WH
5581	Aluminium	White	18x0,1W LED	5581WH 24V

DOWNLIGHT 5581 REWH

LED WITH NIGHT LIGHT

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts with night light function.



- Excellent warm white light.
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18+8
 Light output: 170lm
 Power consumption: 2W white, 0,5W red
 Colour temp: 3000K
 CRI> 80
 Lightcone>120°
 Lifetime>40.000h
 Fixing: 2 springs

Internal driver for 12V DC (11-16V)
 Internal driver for 24V DC (23-29V)

	Dimensions mm/in
A	70mm/2.75in
B	2mm/0.078in
C	18mm/0.70in
D	55mm/2.17in

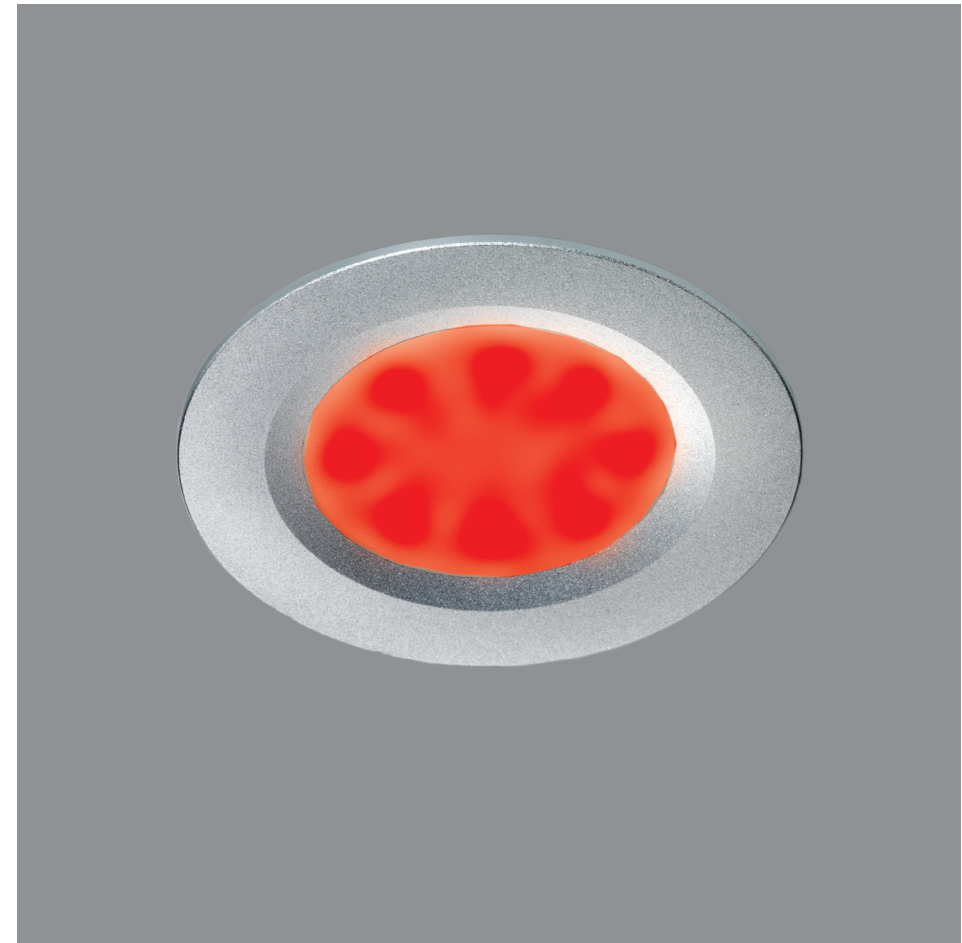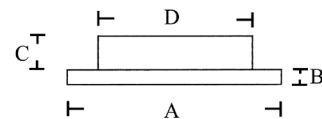

DOWNLIGHT 5581AL REWH

Model	Material	Finish	LED	Part. No.
5581 REWH	Aluminium	Titan	18+8x0,1W LED	5581AL REWH
5581 REWH	Aluminium	Titan	18+8x0,1W LED	5581AL REWH 24V
5581 REWH	Aluminium	Black	18+8x0,1W LED	5581BLACK REWH
5581 REWH	Aluminium	Black	18+8x0,1W LED	5581BLACK REWH 24V
5581 REWH	Aluminium	White	18+8x0,1W LED	5581WH REWH
5581 REWH	Aluminium	White	18+8x0,1W LED	5581WH REWH 24V

DOWNLIGHT 5581WHS

LED WITH SWITCH

CABIN
DENMARK

The ultimate LED downlight for small and medium yachts.
With internal touch switch.


- Excellent warm white light.
- Low power consumption
- Low heat
- Long life
- Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18
Light output: 170lm
Power consumption: 2W
Colour temp: 3000K
CRI> 80
Lightcone>120°
Lifetime>40.000h
Fixing: 2 springs

Internal driver 12V DC (11-16V)

	Dimensions mm/in
A	70mm/2.75in
B	2mm/0.078in
C	18mm/0.70in
D	55mm/2.17in

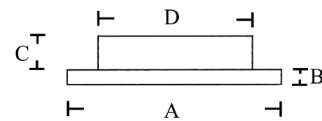

DOWNLIGHT 5581WHS

Model	Material	Finish	LED	Part. No.
5581WHS	Aluminium	White	18x0,1W LED	5581WHS

DOWNLIGHT 5583WH

LED


CABIN
DENMARK

The ultimate LED downlight for larger yachts.

- Excellent warm white light.
- Low power consumption
- Low heat
- Long life
- Small dimensions

LED: 30
 Light output: 260lm
 Power consumption: 3W
 Colour temp: 3000k
 CRI> 80
 Lightcone>120°
 Lifetime>40.000h
 Fixing: 2 springs
 Internal driver for 24V DC (23-29V)

	Dimensions mm/in
A	86mm/3.39in
B	2mm/0.078in
C	42mm/1.65in
D	75mm/2.92in

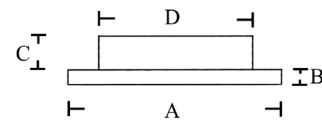

DOWNLIGHT 5583WH

Model	Material	Finish	LED	Part. No.
5583WH	Aluminium	White	30x0,1W LED	5583WH 24V

DOWNLIGHT 5586WH

LED


CABIN
DENMARK

The ultimate LED downlight for larger yachts and ships.

- Excellent warm white light.
- Low power consumption
- Low heat
- Long life
- Small dimensions

LED: 60
 Light output: 520lm
 Power consumption: 6W
 Colour temp: 3000k
 CRI> 80
 Lightcone>120°
 Lifetime>40.000h
 Fixing: 2 springs
 Internal driver for 24V DC (23-29V)

	Dimensions mm/in
A	100mm/3.98in
B	2mm/0.078in
C	52mm/2.05in
D	90mm/3.54in

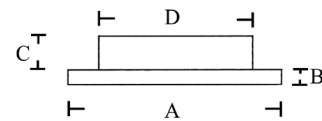

DOWNLIGHT 5586WH

Model	Material	Finish	LED	Part. No.
5586WH	Aluminium	White	60x0,1W LED	5586WH 24V

DOWNLIGHT 5660

LED IP67


CABIN
DENMARK

IP67 downlight for outdoor use. Made of turned stainless steel AISI 316.

LED: 3
 Power consumption: 3,6W
 Colour temperature: 2700k
 CRI >85
 Other colour temperatur on request.
 Lightcone: 36°
 Lifetime >50.000h
 Fixing: 2 springs

For use with 350mA LED driver.
 Driver to be ordered separately.

	Dimensions mm/in
A	65mm/2.56in
B	3mm/0.14in
C	30mm/1.18in
D	45mm/1,73in

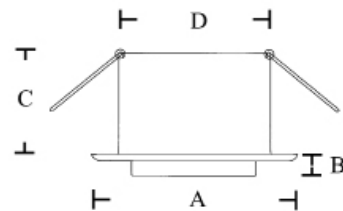

DOWNLIGHT 5660

Model	Material	Finish	LED	Part. No.
5660	Stainless AISI 316	Highly finished	3x1,2W LED	5660

DOWNLIGHT 5860

LED IP67

CABIN
DENMARK

IP67 downlight for outdoor use. Made of turned stainless steel AISI 316.

LED: 3

Power consumption: 3,6W

Colour temperature: 3000k

CRI >85

Other colour temperatur on request.

Lightcone: 25°

16°, 40° on request.


Lifetime >40.000h

Fixing: 4 screws

For use with 350mA LED driver.

Driver to be ordered separately.

	Dimensions mm/in
A	65mm/2.56in
B	11mm/0.43in
C	30mm/1.18in
D	40mm/1,58in

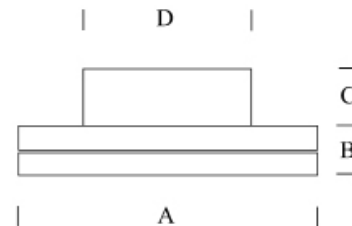

DOWNLIGHT 5860

Model	Material	Finish	LED	Part. No.
5860	Stainless AISI 316	Highly finished	3x1,2W LED	5860

DOWNLIGHT 5960

LED IP67

CABIN
DENMARK

IP67 downlight for outdoor use. Made of turned stainless steel AISI 316.

LED: 3

Power consumption: 3,6W

Colour temperature: 3000k

CRI >85

Other colour temperatur on request.

Lightcone: 25°

16°, 40° on request.


Lifetime >40.000h

Fixing: 4 screws

For use with 350mA LED driver.

Driver to be ordered separately.

	Dimensions mm/in
A	95mm/2.74in
B	13mm/0.51in
C	35mm/1.38in
D	56mm/2.21in

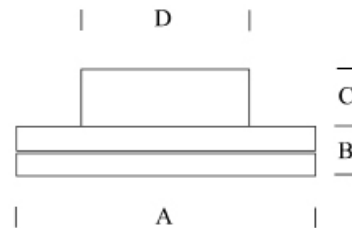

DOWNLIGHT 5960

Model	Material	Finish	Bulb	Part. No.
5960	Stainless AISI 316	Highly finished	3x1,2W LED	5960

POWER LINE LED

1060 SERIES


CABIN
DENMARK

This series of lights is designed for general lighting, reading light or cabinet light.
Quality light wherever you need it.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctuation and guarantees steady light output.
Power consumption 12V - 2,5W, 24V - 3W. The lifetime of the LEDs is more than 50.000h.

The lights are made of aluminum with acrylic lens/cover.
The lights are surface mounted and need minimum space. Easy fixing with screws and clips.

Dimension	Switch	Volt	Part. No.
320 x 18 x 22mm	no	12V	1060WW 320 12V
320 x 18 x 22mm	no	24V	1060WW 320 24V
330 x 18 x 22mm	yes	12V	1060WWS 320 12V
330 x 18 x 22mm	yes	24V	1060WWS 320 24V

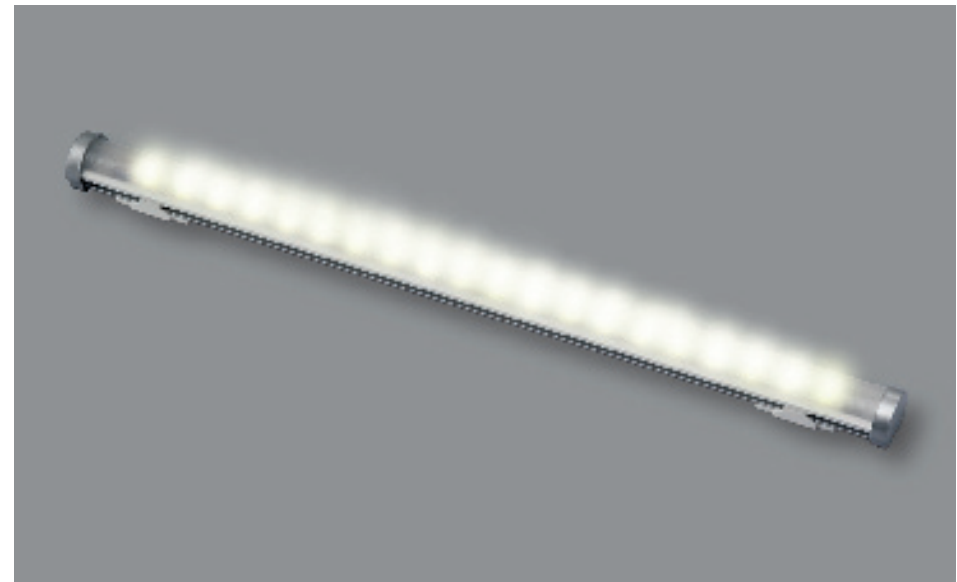

POWER LINE LED 1060WW

POWER LINE LED

1070 SERIES

CABIN
DENMARK

This new series of LED lights is designed for general lighting, reading light or cabinet light. Quality light wherever you need it.

The 320mm version give the same warm white light as a 35W halogen bulb, the 520mm version give light as 50W halogen.

An integrated LED driver regulates voltage fluctuation and garanties steady light output.

Power consumption 320mm = 5W, 520mm = 9W.

The lifetime of the LEDs is more than 50.000h.

The lights are made of aluminum with acrylic lens/cover. The lights are surface mounted and need minimum space. Easy fixing with screws.



LINE LED 1070WWS

Dimension	Switch	Volt	Part. No.
320 x 30 x 12mm	no	11-30V	1070WW 320
520 x 30 x 12mm	no	11-30V	1070WW 520
320 x 30 x 12mm	yes	11-30V	1070WWS 320
520 x 30 x 12mm	yes	11-30V	1070WWS 520

POWER LINE LED

6020 SERIES


CABIN
DENMARK

This series of lights is designed for general lighting, reading light, cabinet light, machine room light or light in sail lockers. Quality light wherever you need it.

24 LEDs give the same warm white light as a 20W halogen bulb.
An integrated LED driver regulates voltage fluctuation and guarantees steady light output.
Power consumption 12V - 2,5W, 24V - 3W. The lifetime of the LEDs is more than 50.000h.

The lights are made of aluminum and anodized, or anodized and white laquered.
IP 65 rating makes these lights ideal for indoor and outdoor use.
The lights are surface mounted and need minimum space. Fixing with two screws.
Dimension 300 x 13 x 8mm. No switch.

Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	White	6020WHWW 12V	6020WHWW 24V
Aluminum	Titan	6029WW 12V	6029WW 24V

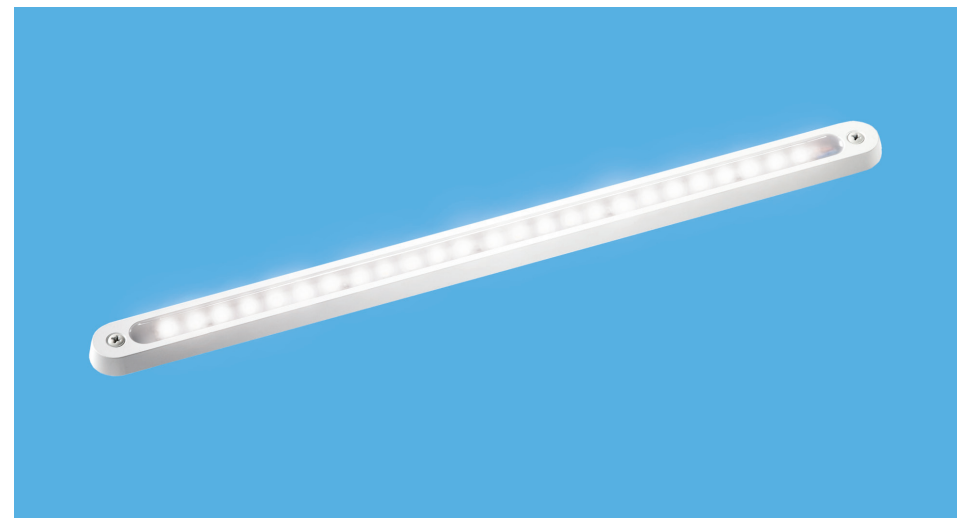

POWER LINE LED 6020WH WW

POWER LINE LED

6120 SERIES


CABIN
DENMARK

This series of lights is designed for general lighting, reading light, cabinet light, machine room light or light in sail lockers. Quality light wherever you need it.

24 LEDs give the same warm white light as a 20W halogen bulb.
An integrated LED driver regulates voltage fluctuation and guarantees steady light output.
Power consumption 12V - 2,5W, 24V - 3W. The lifetime of the LEDs is more than 50.000h.

The lights are made of aluminum and anodized, or anodized and white laquered.
IP 65 rating makes these lights ideal for indoor and outdoor use.
The lights are surface mounted and need minimum space. Fixing with two screws.
Dimension 300 x 20 x 8mm. No switch.

Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	White	6120WHWW 12V	6120WHWW 24V
Aluminum	Titan	6129WW 12V	6129WW 24V

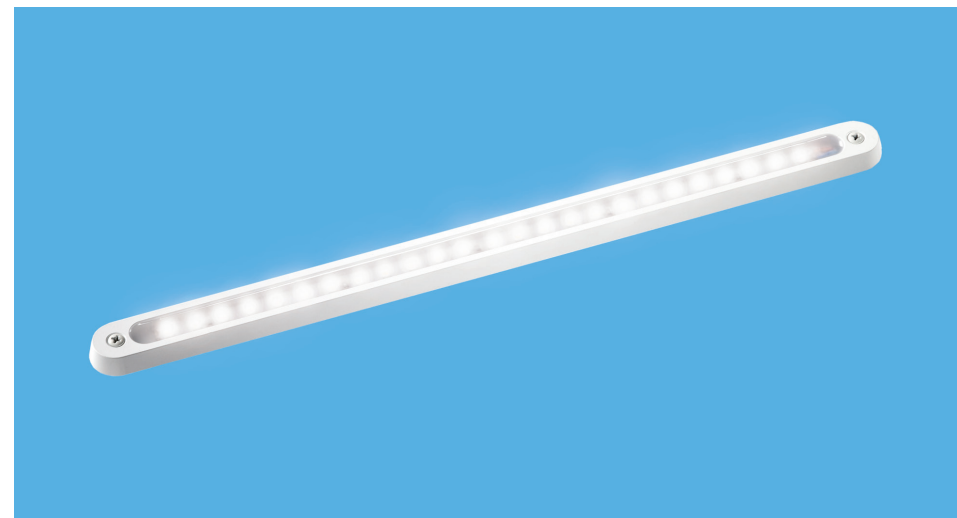

POWER LINE LED 6120WH WW



LED 1000

Surface mounted LED courtesy light made of white lacquered aluminum.

LED 1000 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LEDs is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	6mm/0.25in

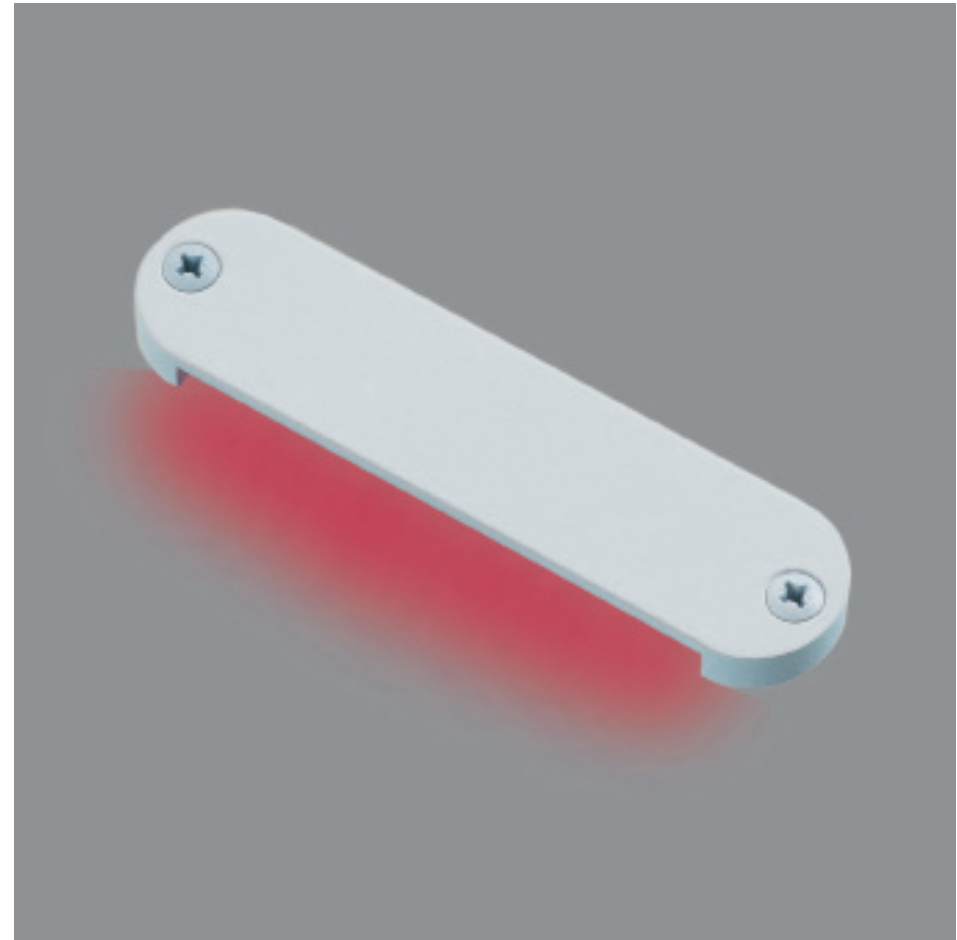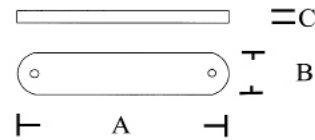

1000WHRE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	White lacquered	blue	12	1000WH BL IP65
Aluminum	White lacquered	red	12	1000WH RE IP65
Aluminum	White lacquered	white	12	1000WH WH IP65
Aluminum	White lacquered	yellow	12	1000WH YE IP65
Aluminum	White lacquered	blue	24	1000WH BL IP65 24V
Aluminum	White lacquered	red	24	1000WH RE IP65 24V
Aluminum	White lacquered	white	24	1000WH WH IP65 24V
Aluminum	White lacquered	yellow	24	1000WH YE IP65 24V



LED 1006

Surface mounted LED courtesy light made of highly finished stainless steel.

LED 1006 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	6mm/0.25in

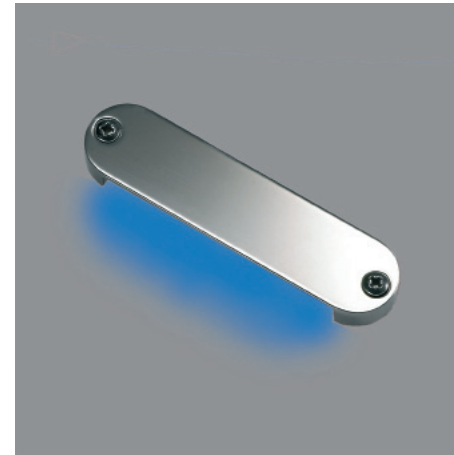

1006BL IP65



1006RE IP65



1006WH IP65



1006YE IP65

Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1006BL IP65
Stainless steel	highly finished	red	12	1006RE IP65
Stainless steel	highly finished	white	12	1006WH IP65
Stainless steel	highly finished	yellow	12	1006YE IP65
Stainless steel	highly finished	blue	24	1006BL IP65 24V
Stainless steel	highly finished	red	24	1006RE IP65 24V
Stainless steel	highly finished	white	24	1006WH IP65 24V
Stainless steel	highly finished	yellow	24	1006YE IP65 24V


LED 1008

Surface mounted LED courtesy light made of black anodized aluminum.

LED 1008 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	6mm/0.25in

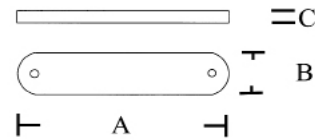

1008YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	black anodized	blue	12	1008BL IP65
Aluminum	black anodized	red	12	1008RE IP65
Aluminum	black anodized	white	12	1008WH IP65
Aluminum	black anodized	yellow	12	1008YE IP65
Aluminum	black anodized	blue	24	1008BL IP65 24V
Aluminum	black anodized	red	24	1008RE IP65 24V
Aluminum	black anodized	white	24	1008WH IP65 24V
Aluminum	black anodized	yellow	24	1008YE IP65 24V


LED 1009

Surface mounted LED courtesy light made of titan anodized aluminum.

LED 1009 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	6mm/0.25in

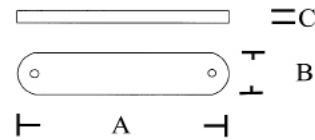

1009WH IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12	1009BL IP65
Aluminum	titan anodized	red	12	1009RE IP65
Aluminum	titan anodized	white	12	1009WH IP65
Aluminum	titan anodized	yellow	12	1009YE IP65
Aluminum	titan anodized	blue	24	1009BL IP65 24V
Aluminum	titan anodized	red	24	1009RE IP65 24V
Aluminum	titan anodized	white	24	1009WH IP65 24V
Aluminum	titan anodized	yellow	24	1009YE IP65 24V



LED 1010

Surface mounted LED courtesy light made of white lacquered aluminum.


LED 1010 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	5mm/0.20in

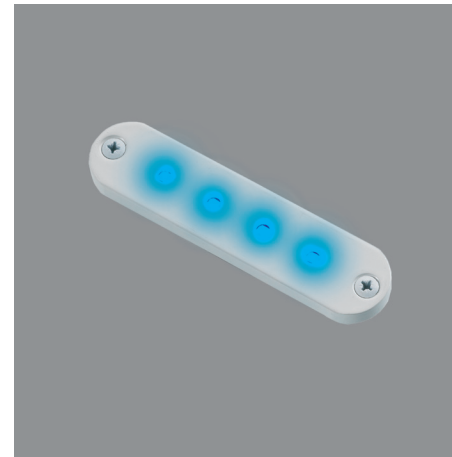


1010WH BL IP65

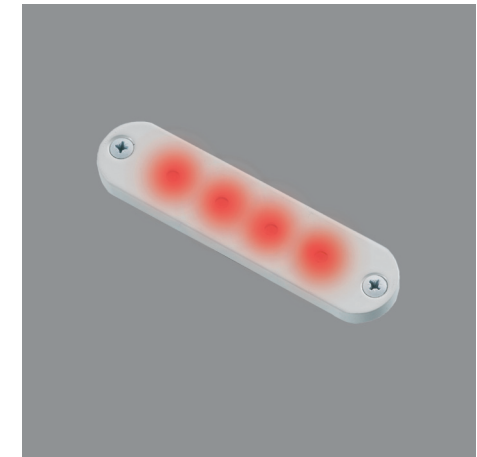

1010WH RE IP65



1009WH WH IP65

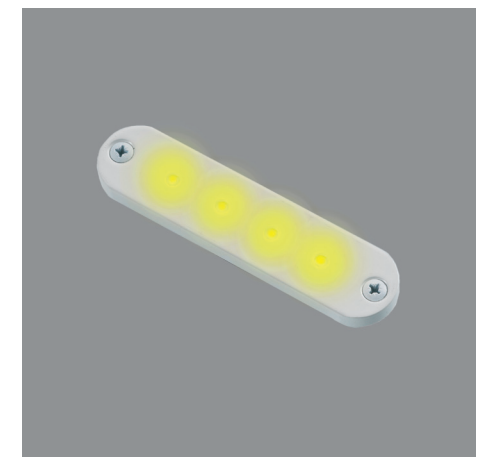

1010WH YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	White lacquered	blue	12	1010WH BL IP65
Aluminum	White lacquered	red	12	1010WH RE IP65
Aluminum	White lacquered	white	12	1010WH WH IP65
Aluminum	White lacquered	yellow	12	1010WH YE IP65
Aluminum	White lacquered	blue	24	1010WH BL IP65 24V
Aluminum	White lacquered	red	24	1010WH RE IP65 24V
Aluminum	White lacquered	white	24	1010WH WH IP65 24V
Aluminum	White lacquered	yellow	24	1010WH YE IP65 24V



LED 1016

Surface mounted LED courtesy light made of highly finished stainless steel.

LED 1016 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	5mm/0.20in

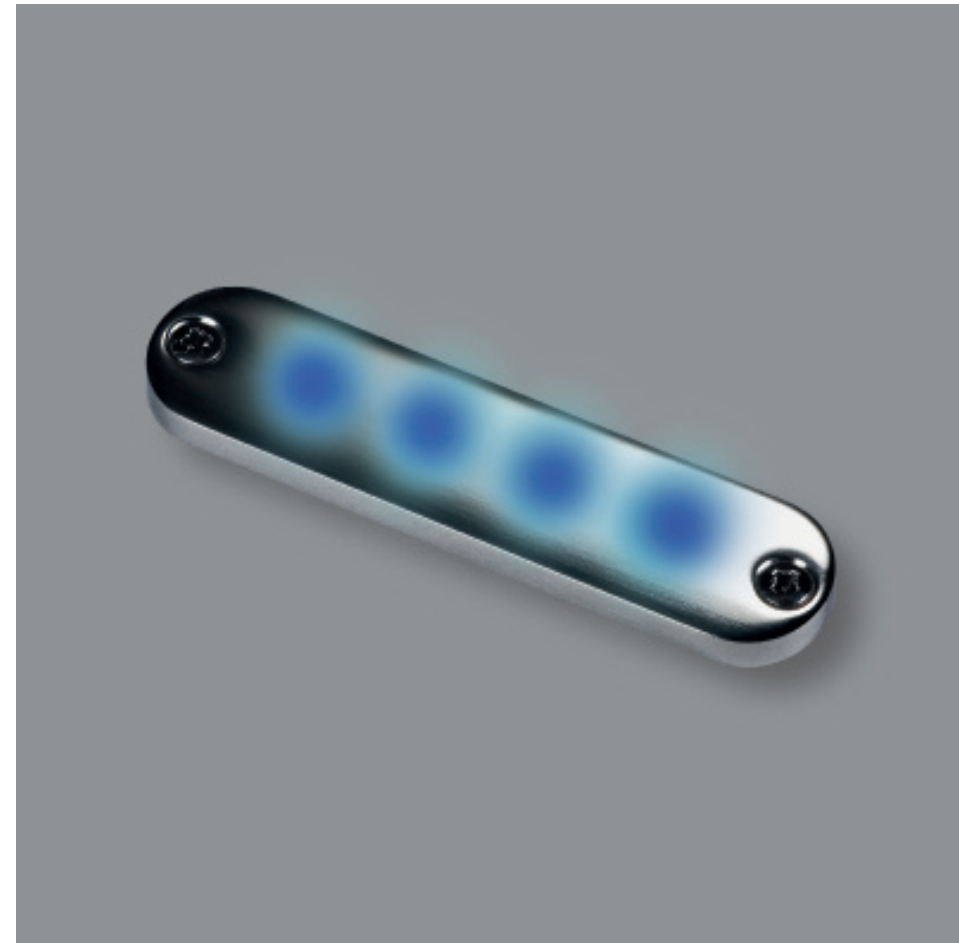

1016BL IP65

Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1016BL IP65
Stainless steel	highly finished	red	12	1016RE IP65
Stainless steel	highly finished	white	12	1016H IP65
Stainless steel	highly finished	yellow	12	1016YE IP65
Stainless steel	highly finished	blue	24	1016BL IP65 24V
Stainless steel	highly finished	red	24	1016RE IP65 24V
Stainless steel	highly finished	white	24	1016WH IP65 24V
Stainless steel m	highly finished	yellow	24	1016YE IP65 24V



LED 1018

Surface mounted LED courtesy light made of black anodized aluminum.


LED 1018 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	5mm/0.20in

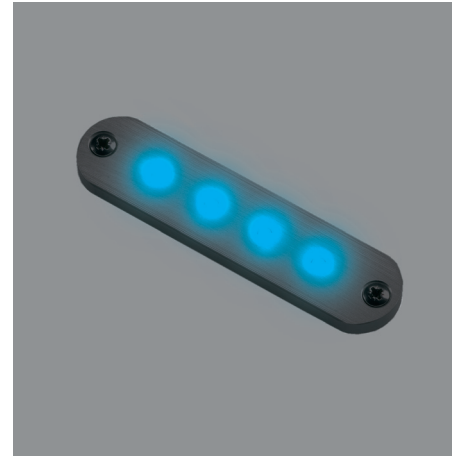


1018BL IP65

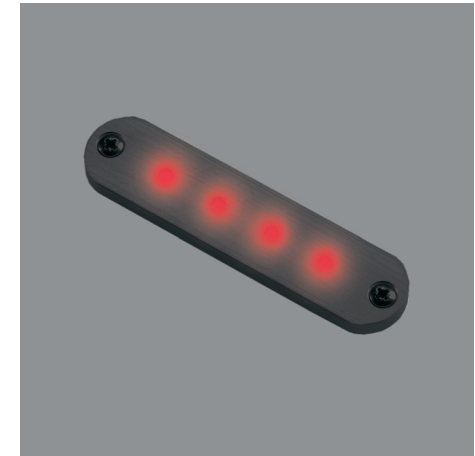

1018RE IP65



1018WH IP65

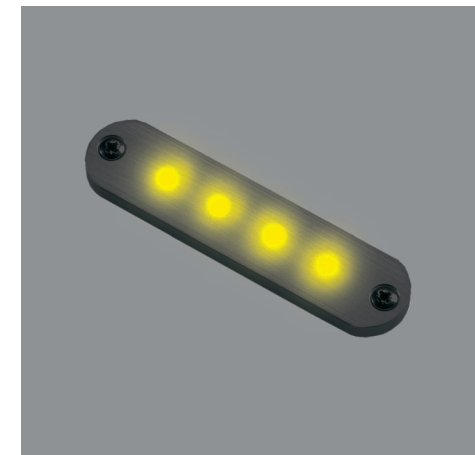

1018YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	black anodized	blue	12	1018BL IP65
Aluminum	black anodized	red	12	1018RE IP65
Aluminum	black anodized	white	12	1018WH IP65
Aluminum	black anodized	yellow	12	1018YE IP65
Aluminum	black anodized	blue	24	1018BL IP65 24V
Aluminum	black anodized	red	24	1018RE IP65 24V
Aluminum	black anodized	white	24	1018WH IP65 24V
Aluminum	black anodized	yellow	24	1018YE IP65 24V



LED 1019

Surface mounted LED courtesy light made of titan anodized aluminum.


LED 1019 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	5mm/0.20in

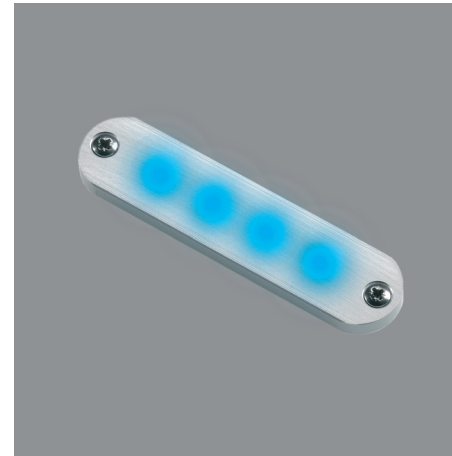


1019BL IP65

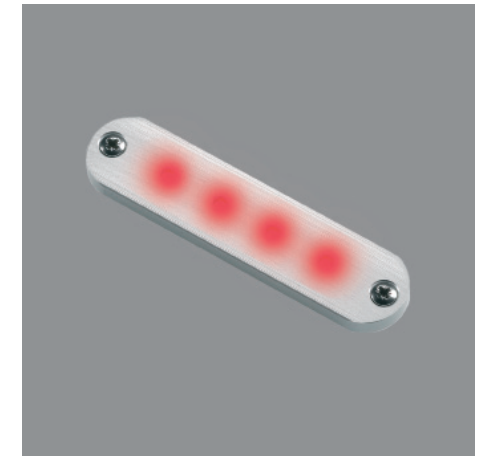

1019RE IP65



1019WH IP65

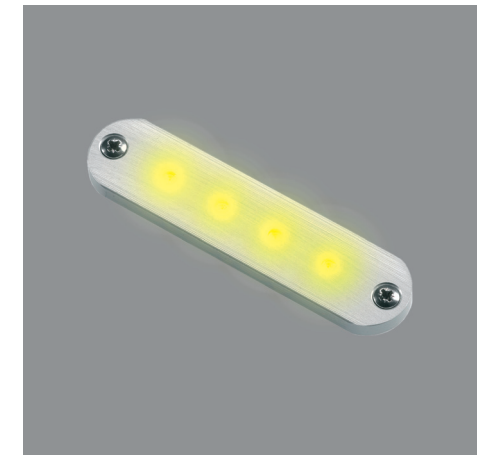

1019YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12	1019BL IP65
Aluminum	titan anodized	red	12	1019RE IP65
Aluminum	titan anodized	white	12	1019WH IP65
Aluminum	titan anodized	yellow	12	1019YE IP65
Aluminum	titan anodized	blue	24	1019BL IP65 24V
Aluminum	titan anodized	red	24	1019RE IP65 24V
Aluminum	titan anodized	white	24	1019WH IP65 24V
Aluminum	titan anodized	yellow	24	1019YE IP65 24V


LED 1038

Semi surface mounted LED courtesy light made of anodized aluminum.

LED 1038 series illuminates from one lens with a 30° light cone. Ideal step light and night light for indoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	90mm/3.55in
B	25mm/0.99in
C	3mm/0.12in
D	12mm/0.45in

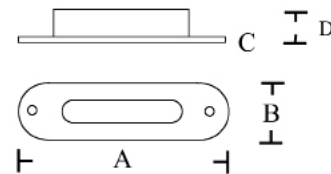

1038RE

Material	Finish	LED	Volt	Part. No.
Aluminum	Black anodized	blue	12V	1038BL
Aluminum	Black anodized	red	12V	1038RE
Aluminum	Black anodized	white	12V	1038WH
Aluminum	Black anodized	yellow	12V	1038YE
Aluminum	Black anodized	blue	24V	1038BL 24V
Aluminum	Black anodized	red	24V	1038RE 24V
Aluminum	Black anodized	white	24V	1038WH 24V
Aluminum	Black anodized	yellow	24V	1038YE 24V



LED 1039

Semi surface mounted LED courtesy light made of titan anodized aluminum.

LED 1039 series illuminates from one lens with a 30° light cone. Ideal step light and night light for indoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	90mm/3.55in
B	25mm/0.99in
C	3mm/0.12in
D	12mm/0.45in

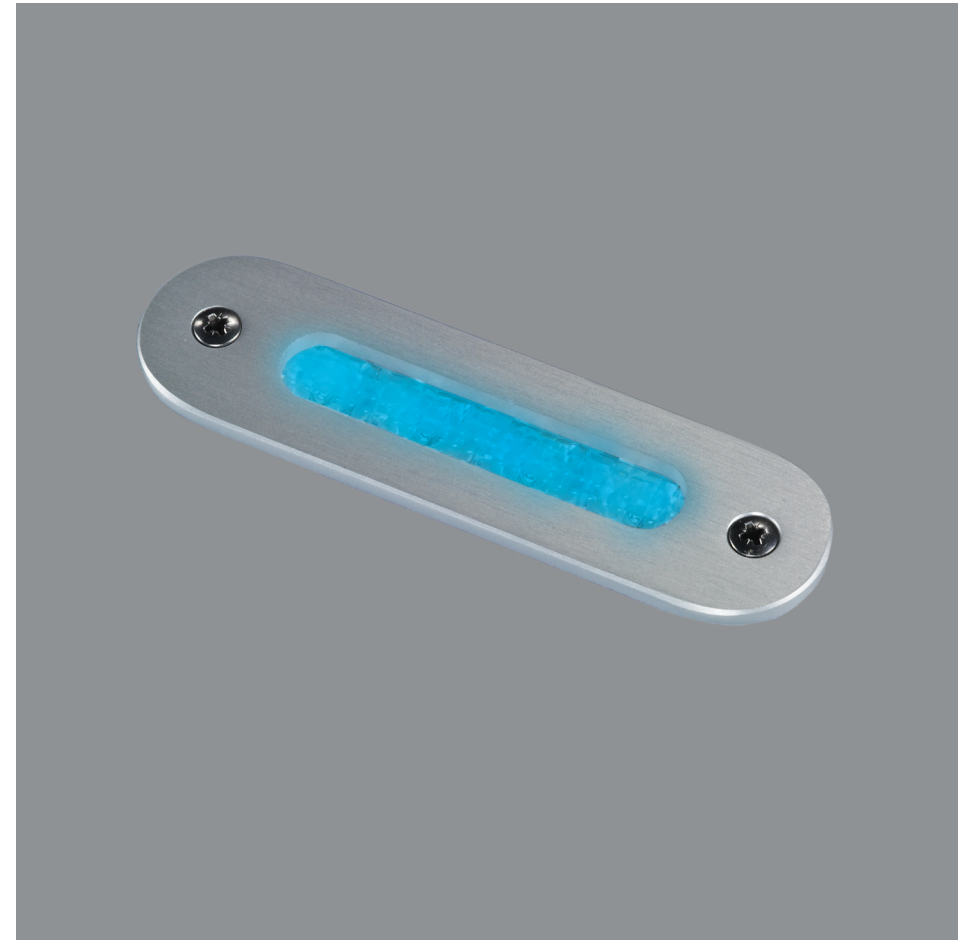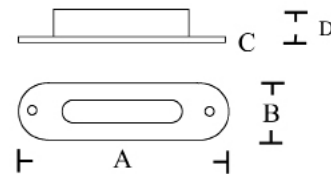

1039BL

Material	Finish	LED	Volt	Part. No.
Aluminum	Titan anodized	LED blue	12V	1039BL
Aluminum	Titan anodized	LED red	12V	1039RE
Aluminum	Titan anodized	LED white	12V	1039WH
Aluminum	Titan anodized	LED yellow	12V	1039YE
Aluminum	Titan anodized	LED blue	24V	1039BL 24V
Aluminum	Titan anodized	LED red	24V	1039RE 24V
Aluminum	Titan anodized	LED white	24V	1039WH 24V
Aluminum	Titan anodized	LED yellow	24V	1039YE 24V

LED 1030-2

Semi surface mounted LED light made of brass.


* Custom made finish to fit your demand.

Very discrete step light and night light for classic yachts.

Illuminates from one opal defuser. No visible LED dots.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	90mm/3.55in
B	25mm/0.99in
C	3mm/0.12in
D	20mm/0.78in

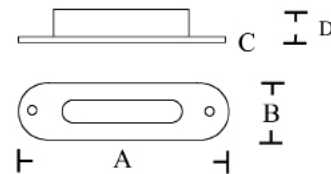

1030-2CBL

Material	Finish	LED	Volt	Part. No.
Brass	Custom	blue	12V	1030-2*BL
Brass	Custom	red	12V	1030-2*RE
Brass	Custom	warm white	12V	1030-2*WW
Brass	Custom	yellow	12V	1030-2*YE
Brass	Custom	blue	24V	1030-2*BL 24V
Brass	Custom	red	24V	1030-2*RE 24V
Brass	Custom	warm white	24V	1030-2*WW 24V
Brass	Custom	yellow	24V	1030-2*YE 24V



LED 1039-2

Semi surface mounted LED light made of aluminum - titan anodized.
Very discrete step light and night light for classic yachts.

Illuminates from one opal defuser.
No visible LED dots.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	90mm/3.55in
B	25mm/0.99in
C	3mm/0.12in
D	20mm/0.78in

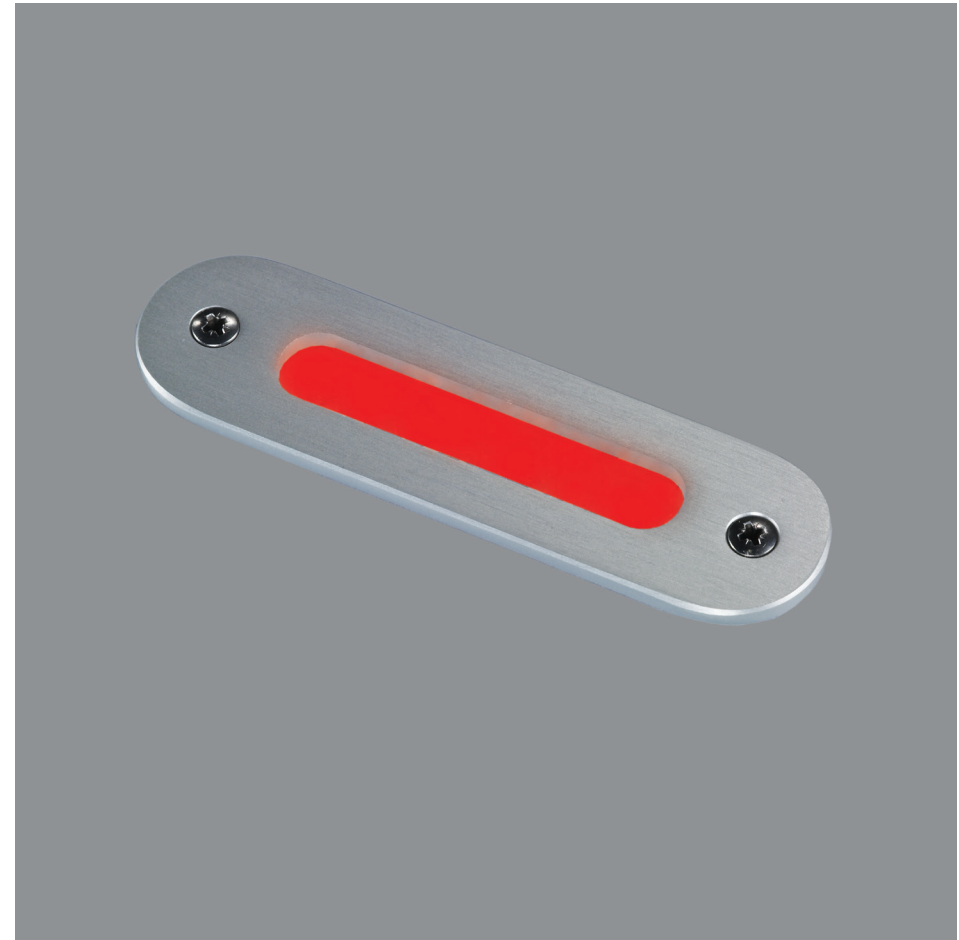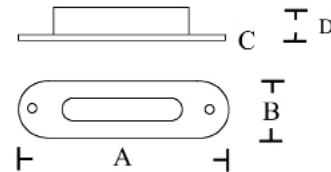

1039-2RE

Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12V	1039-2BL
Aluminum	titan anodized	red	12V	1039-2RE
Aluminum	titan anodized	warm white	12V	1039-2WW
Aluminum	titan anodized	yellow	12V	1039-2YE
Aluminum	titan anodized	blue	24V	1039-2BL 24V
Aluminum	titan anodized	red	24V	1039-2RE 24V
Aluminum	titan anodized	warm white	24V	1039-2WW 24V
Aluminum	titan anodized	yellow	24V	1039-2YE 24V



X-YACHTS OF DENMARK
CURTESY LIGHT 1039-2RE
IN X-65


LED 1116

Surface mounted LED courtesy light made of stainless steel.

LED 1116 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W.
The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	82mm/3.23in
B	20mm/0.78in
C	5mm/0.20in



1116RE IP65

Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1116BL IP65
Stainless steel	highly finished	red	12	1116RE IP65
Stainless steel	highly finished	white	12	1116H IP65
Stainless steel	highly finished	yellow	12	1116YE IP65
Stainless steel	highly finished	blue	24	1116BL IP65 24V
Stainless steel	highly finished	red	24	1116RE IP65 24V
Stainless steel	highly finished	white	24	1116WH IP65 24V
Stainless steel m	highly finished	yellow	24	1116YE IP65 24V

MAST LED

6900 SERIES

CABIN
DENMARK

LED mast light for larger yachts.

The powerfull LEDs illuminate with a minimum of power consumption.
The lights are made of turned aluminum.
The surface is anodized or white lacquered.

Power consumption: 3,6W
Colour temperature: 4500k, CRI >80
On request: 3000k
Lightcone: 16°
On request: 25°, 40°
Lifetime of LED >40.000h
Internal driver for 12V-24V DC.

Dimensions: Ø95 x 40mm
Fixing: M5 screws AISI 316
1500mm cable, other length on request
IP 67

Mast bracket 6900BR to be ordered separately.

Model	Material	Finish	LED	Part. No.
MAST LED	Aluminum	White	3x1,2W	6900-02WH
MAST LED	Aluminum	Black	3x1,2W	6908-02
MAST LED	Aluminum	Titan	3x1,2W	6909-02



MAST LED 6908-02

SPREADER LED

6500 SERIES

CABIN
DENMARK

LED spreader LED for larger yachts.

The powerfull LEDs illuminate with a minimum of power consumption.

The lights are made of turned aluminum.
The surface is anodized or white lacquered.
The design fits the curve and angle of modern spreaders.

Ligth cone 16° lit-up area Ø 2m
Port/Starb 16 x 43° lit-up area 2 x 5m
See also page 80.

Power consumption: 3,6W
Colour temperature: 4500k, CRI >80
Lifetime of LED >40.000h
Internal driver for 12V-24V DC.

Dimensions: 65 x 44 x 30mm
Fixing: M5 screws AISI 316 or rivets
1500mm cable, other length on request
IP 67

Material	Finish	LED	Part. No.
Aluminum	White	3x1,2W	6500-02WH 16
Aluminum	White	3x1,2W	6500-02WH PORT
Aluminum	White	3x1,2W	6500-02WH STARB
Aluminum	Black	3x1,2W	6508-02 16
Aluminum	Black	3x1,2W	6508-02 PORT
Aluminum	Black	3x1,2W	6508-02 STARB
Aluminum	Titan	3x1,2W	6509-02 16
Aluminum	Titan	3x1,2W	6509-02 PORT
Aluminum	Titan	3x1,2W	6509-02 STARB



SPREADER LED 6508-02

SPREADER LED

6600 SERIES

CABIN
DENMARK

LED spreader LED for larger yachts.

The powerfull LEDs illuminate with a minimum of power consumption.

The lights are made of turned aluminum. The surface is anodized or white lacquered. Circle housing fits the design of larger spreaders.

Ligth cone 16° lit-up area Ø2m
Light cone 16 x 43° lit-up area 2 x 5m
See also page 80.

Power consumption: 3,6W
Colour temperature: 4500k, CRI >80
Lifetime of LED >40.000h
Internal driver for 12V-24V DC

Dimensions: 65 x 30mm
Fixing: M5 screws AISI 316 or rivets
1500mm cable, other length on request
IP 67

Material	Finish	LED	Part. No.
Aluminum	White	3x1,2W	6600-02WH 16
Aluminum	White	3x1,2W	6600-02WH 16x43
Aluminum	Black	3x1,2W	6608-02 16
Aluminum	Black	3x1,2W	6608-02 16x43
Aluminum	Titan	3x1,2W	6609-02 16
Aluminum	Titan	3x1,2W	6609-02 16x43



SPREADER LED 6608-02

SPREADER LED
6500 SERIES



BOOM LED

6000 SERIES

CABIN
DENMARK

This series of lights is designed to give cockpit light from the boom.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Power consumption 12V - 2,5W, 24V - 3W.
The lifetime of the LEDs is more than 50.000h.

The lights are made of aluminum. The surface is anodized or white lacquered.

The lights are surface mounted and fit into the gap in smaller booms.

Dimension 300 x 13 x 8mm.

Fixing: M4 screws AISI 316 or rivets
6000mm cable, other length on request
IP 65

Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	White	6030WHWW 12V	6030WHWW 24V
Aluminum	Titan	6039WW 12V	6039WW 24V



BOOM LED 6039WW

BOOM LED

6100 SERIES

CABIN
DENMARK

This series of lights is designed to give cockpit light from the boom.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Power consumption 12V - 2,5W, 24V - 3W.
The lifetime of the LEDs is more than 50.000h.

The lights are made of aluminum. The surface is anodized or white lacquered.

The lights are surface mounted and fit into the gap in smaller booms.

Dimension 300 x 20 x 8mm.

Fixing: M4 screws AISI 316 or rivets

6000mm cable, other length on request

IP 65


Material	Finish	Part. No. 12V	Part. No. 24V
Aluminum	White	6130WHWW 12V	6130WHWW 24V
Aluminum	Titan	6139WW 12V	6139WW 24V



BOOM LED 6139WW

SPREADER LED - MAST LED - BOOM LED

CABIN
DENMARK

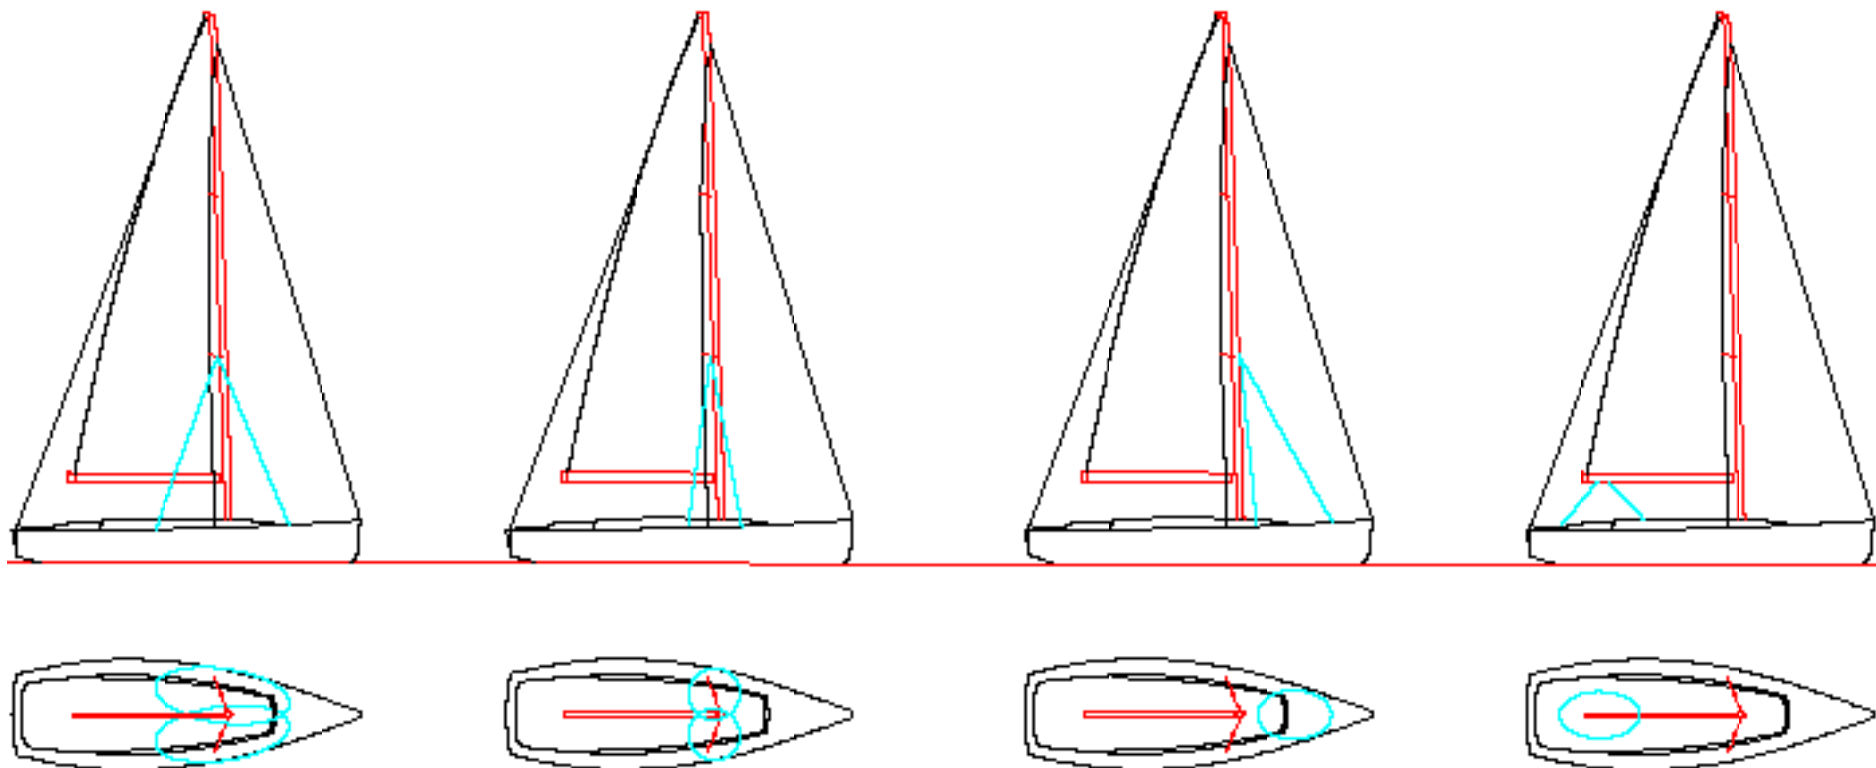

SPREADER LED 6500, 6600 SERIES
LIGHT CONE 16 X 43°
SPREADER ANGLE 21°
SPREADER 6m OVER DECK
LIT-UP AREA 2 X 5m

SPREADER LED 6500, 6600 SERIES
LIGHT CONE 16°
SPREADER 6m OVER DECK
LIT-UP AREA Ø 2m

MAST LED 6900 SERIES
LIGHT CONE 16°
LIGHT 6m OVER DECK
LIT-UP AREA Ø 2 X 3m

BOOM LED 6000, 6100 SERIES
LIGHT CONE 120°
LIGHT 2m OVER DECK
LIT-UP AREA Ø 2 - 3m